

ODM SOLUTION PROVIDER OF LED RETROFITS AND STRIP LIGHTS



深圳市诚忠信实业有限公司

SHENZHEN FAITH LIGHTING TECHNOLOGY CO., LTD

Tel : +86(0)755-23288890 Fax : +86(0)755 33124090

Web : www.szzccc.com E-mail : info@szzccc.com

Adds : Add: 1Building, Zhen Bao Industrial Park, Bei Huan Rd,
Shiyan, Town, Bao'an District, Shenzhen, Guangdong,
China



Product Catalog 2018

深圳市诚忠信实业有限公司

全心关注 铸就卓越

LED 灯带照明领跑者



LED ENERGY SAVING PARTNER ALL THE WAY



公司简介

深圳市诚忠信实业有限公司成立于2010年，是一家集研发、制造、销售、服务为一体的LED高科技绿色照明企业，工厂地处广东省深圳市，公司注册资金500万。目前照明方案涉及住宅、KTV、商业和工业应用等领域。主要产品包括LED软灯条、LED线条灯、LED橱柜灯、等多系列产品。诚忠信照明本着“将节能进行到底”的核心理念，把低碳生活贯彻到每一位诚忠信人的心中，将LED灯光的运用与体验作为企业推广使命。公司已通过ISO9001/2008质量体系认证，产品已通过ERP, TUV, UL认证，欧盟CE质量认证。多年来在LED行业不断创新与突破，团队引进德国、意大利最新生产工艺。其灯条、线条灯、橱柜灯等产品远销欧、美、澳、东南亚、中东、港台等30多个国家和地区。完善的LED照明解决方案和快速市场反应让我们成为全球客户定制解决方案的首选供应商。

未来，公司将一如既往的加大生产与研发的投入，专注在led照明市场，为全球节能减排奉献我们的一份力量。

ABOUT US

Shenzhen Faith Lighting is a hi-tech enterprise which focuses on the development, production, sales and sales and service of LED indoor lighting, founded in 2010. Our plant covers an area of 6000m² and we have experienced professional skill outstanding technical research team and management team. We have production lines for led strips, LED Linea light, LED Cabinet light. We are certified with ISO9001:2008 and CE, ROHS for led lighting. We are dedicated to improve our quality and management system and with good quality and perfect after sales service to develop international market. We are exporting to Europe, North America, Japan and South America etc.

Shenzhen Faith Lighting industrial CO., LTD is always improving and exploring to do better. We will do our best to make better future.

工厂车间实景/Real Factory

组装车间 Assembly Workshop



贴片机 SMT fine-pitch mounter.



滴胶车间 Dispensing Workshop




积分球 integrating sphere test



资质证书:CE、ROHS、TUV、UL、ETL、ERP、ISO9001/2008




2835 Super Brightness
DC12/24V Flexible Strip

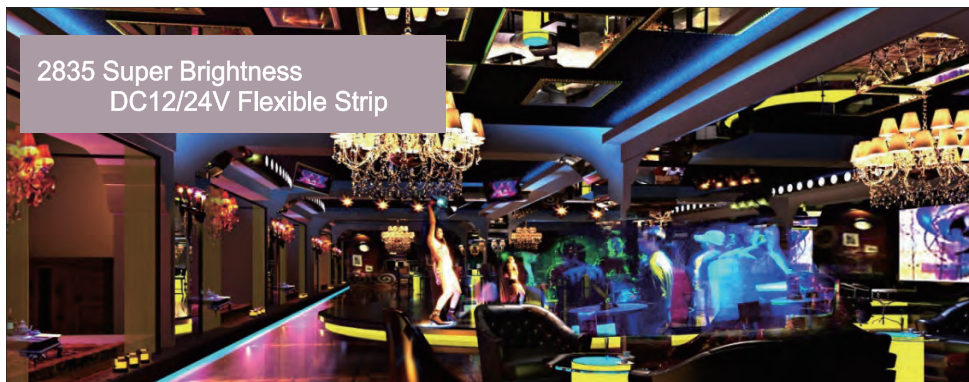

FA-2835-60



LED Qty : 60pcs/m
Power : 12 W/m
Input Voltage : DC12 / 24V
LED Color : W / WW / R / G / B / Y
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°
Resistor:68 Ω
Lumen/m:920LM
CRI:80




Remark: 2835 0.2W 22-24LM per each LED, CRI 80. Resistor 68, high power high lumen, high brightness.



FA-2835-120



LED Qty : 120pcs/m
Power : 24 W/m
Input Voltage : DC12 / 24V
LED Color : W / WW / R / G / B / Y
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°
Resistor:68 Ω
Lumen/m:1700LM
CRI:80




FA-2835-240




LED Qty : 240pcs/m
Power : 30W/m
Input Voltage : DC12 / 24V
LED Color : W / WW / R / G / B / Y
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°
Resistor:68 Ω
Lumen/m:2400LM
CRI:80



2300
lm/m




12V LED SMD 5050 Flexible Strip Series

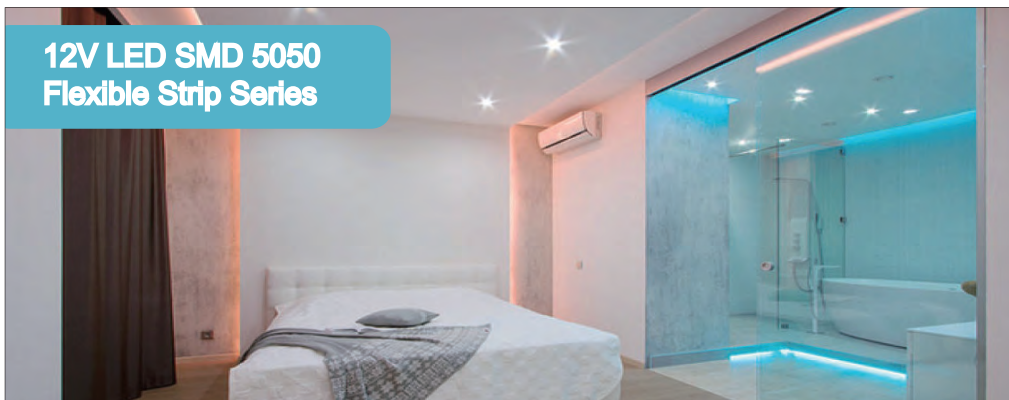

FA-5050-30



LED Qty : 30pcs/m
Power : 7.2 W/m
Input Voltage : DC12 / 24V
LED Color : RGB / R / G / B / Y / W / WW
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°
Lumen/m:540LM
CRI:80




Remark: 5050 have difference lumen: 16-18LM/18-20LM/22-24LM.



FA-5050-60



LED Qty : 60pcs/m
Power : 14.4W/m
Input Voltage : DC12 / 24V
LED Color : RGB / R / G / B / Y / W / WW
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°
Lumen/m:900LM
CRI:80




FA-5050-120



LED Qty : 120pcs/m
Power : 28.8 W/m
Input Voltage : DC 24V
LED Color : W / WW / R / G / B / Y
Protection Grade : IP20
Package : 5 M / ROLL
Beam Angle : 120°
Lumen/m:1500LM
CRI:80



Lumens Bright





SMD 5730 Flexible Strip Light



FA-5730-60



LED Qty : 60pcs/m

Power : 20 W

Input Voltage : DC12 / 24V



LED Color : R / G / B / Y / W / WW

PCB Width: 8mm



Protection Grade : IP65 / IP 20





Package : 5 M / ROLL

Beam Angle : 120°

Lumen/m:2400LM

CRI:80

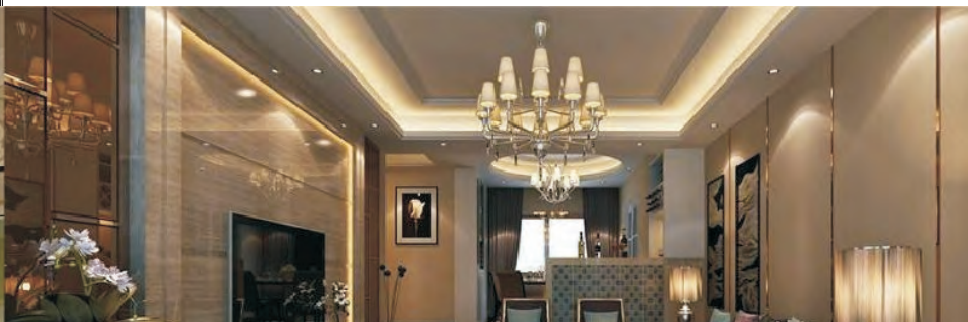

SMD2016 Flexible Strip Light



FA-2016-240



LED Qty : 240pcs/m

Power : 23 W

Input Voltage : DC 24V



LED Color : W / WW

PCB Width: 8mm



Protection Grade : IP65 / IP 20




Package : 5 M / ROLL

Beam Angle : 120°

Lumen/m:2100LM

CRI:80



12V LED SMD Flexible Strip Series



12V LED SMD Flexible Strip Series


Flexible LED strip, also called LED ribbon, is made of SMD2835,5050,5054 etc. After doing finished product, it is just like a flexible string, that's why we called it LED strip, too.

1. Low power consumption, high quality, super-bright but running with low temperature.
2. All the light spread and completely smooth, luminous very even.
3. Every 3-LEDs or 6-LEDs cuttable without damaging the rest strips, according to your requirement.
4. Self-adhesive back with 3M adhesive tape for secure and easy application.



FA-5050-30-IC

LED Qty : 30pcs/m with 10 IC/m
Power : 7.2W/m
Input Voltage : DC12 / 24V
LED Color : Magic RGB
PCB Width: 10mm
Protection Grade : IP65 / IP 20
Package : 5 M / ROLL
Beam Angle : 120°

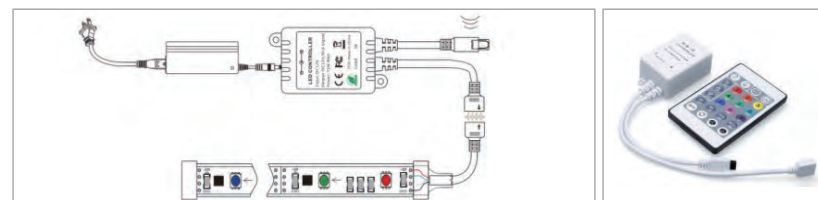

Outline

This strip is using infrared magic 24 keys controller to control digital 1003 IC, changing color brightness and speed modes etc, the special functions are running chasing effect and memorable. When you save favorite effects loop display, set the IC light points, it will automatic playback.

Feature

1. Adaptive DC 12V input Voltage and input polarity protection function.
2. The remote control allows the preservation favorite style circulate show.
3. Infrared remote control, you can set the lights IC points, support continuous button.
4. Color changing, flexible control.
5. 231 kinds of changing modes, special running chasing effect and memorable function.
6. Compact, standard input and output interface, easy to instal, economical




DC 12V/24V Super
Brightness Flexible LED Strip



FA-5050- CW+WW



LED Qty : 60pcs/m
Power : 14.4 W/m
Input Voltage : DC12 / 24V
LED Color : W / WW
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°




Flexible LED strip, also called LED ribbon, is made of SMD2835,5050,5054 etc. After doing finished product, it is just like a flexible string, that's why we called it LED strip, too.



FA-5050-RGB+CW+WW FA-5050-RGB+CW FA-5050-RGB+WW

LED Qty : 60pcs/m
Power : 14.4W/m
Input Voltage : DC12 / 24V
LED Color : RGB + W / RGB + WW
Protection Grade : IP68 / IP66 / IP65 / IP20
Package : 5 M / ROLL
Beam Angle : 120°





SMD5025 Flexible Strip Light



FA-5025-60



LED Qty : 60pcs/m
Power : 6W/m
Input Voltage : DC12 / 24V
LED Color : R / G / B / Y / W / WW
PCB Width: 10mm
Protection Grade : IP65 / IP 20
Package : 5 M / ROLL
Beam Angle : 120°



5025 Controller




Three colors choice, you can change the color to white at summer, also you can change the color to warm white at winter.
Color change according to your mind~

* Lumen:25LM, 0.2W/PCS




RGBW in one chip Flexible Strip Light

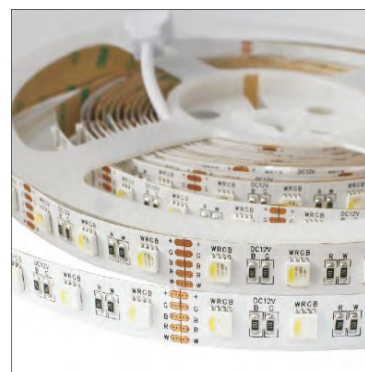

FA-RGBW-60



LED Qty : 60pcs/m
Power : 10 W/m
Input Voltage : DC12 / 24V
LED Color : R / G / B / Y / W / WW
PCB Width: 10mm
Protection Grade : IP65 / IP 20
Package : 5 M / ROLL
Beam Angle : 120°

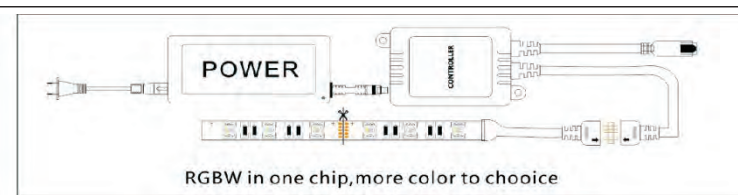

RGBW in one chip, more color to choose
RGBW strip, more colors to choose


5V USB LED Strip



USB-5050-30





LED Qty : 30pcs/m
Power : 7.2W
Input Voltage : DC 5V
LED Color : R / G / B / W / WW
Protection Grade : IP65 / IP20
Package : 1 M / ROLL
Beam Angle : 120°



USB-5050-30-RGB



LED Qty : 30pcs/m
Power : 7.2W
Input Voltage : DC 5V
LED Color : RGB
Protection Grade : IP65 / IP20
Package : 1 M / ROLL
Beam Angle : 120°




5V USB LED Strip for TV




USB-3528-60

LED Qty : 60pcs/m
Power : 4.8W
Input Voltage : DC 5V
LED Color : R / G / B / W / WW
Protection Grade : IP65 / IP20
Package : 1M / ROLL
Beam Angle : 120°




USB-5050-60

LED Qty : 60pcs/m
Power : 14.4W
Input Voltage : DC 5V
LED Color : R / G / B / W / WW
Protection Grade : IP65 / IP20
Package : 1 M / ROLL
Beam Angle : 120°



USB-5050-58-RGB

LED Qty : 58pcs/m
Power : 14.4W
Input Voltage : DC 5V
LED Color : RGB
Protection Grade : IP65 / IP20
Package : 1M / ROLL
Beam Angle : 120°



110V-220V
2835 SMD LED Neon Flex
5050 SMD RGB LED Neon Flex



FA-2835-92-HV



LED Qty : 92 pcs/m

Power : 6 W/m



Input Voltage : AC110V / 220V



LED Color : R / G / B / Y / W / WW

Protection Grade : IP67



Package : 50 M / ROLL

Beam Angle : 120°

Life Span : 20,000h

2835 SMD is the smaller size of LED NEON FLEX. It is good for making pattern, letter and more complicated sign because of its smaller and flexible characteristic. It also has all the advantage of LED NEON FLEX such as long life, flexible, energy saving etc.



FA-5050-60-HV



LED Qty : 60 pcs/m

Power : 8 W/m



Input Voltage : AC110V / 220V



LED Color : RGB

Protection Grade : IP67




Package : 50 M / ROLL

Beam Angle : 120°

Life Span : 20,000h


With RED, GREEN, BLUE this 3 base color LED inside, RGB LED NEON FLEX can display any color you want with our controller! So it can perform a vivid, gorgeous and digital effect much better than the traditional GLASS NEON. It also has all the advantage of LED NEON FLEX such as long life, flexible, energy saving etc.

220V / 110V SMD LED Flexible Strip Series

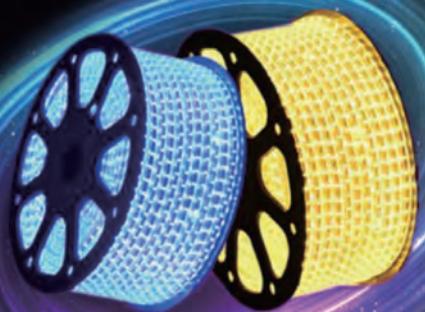


FA-5050-60-HV

LED Qty : 60 pcs/m
Power : 14 W/m
Input Voltage : AC110V / 220V
LED Color : RGB / R / G / B / Y / W / WW
Protection Grade : IP67
Package : 50 M / ROLL
Beam Angle : 120°
Life Span : 20,000h



FA-5730-60-HV

LED Qty : 60 pcs/m
Power : 12 W/m
Input Voltage : AC110V / 220V
LED Color : W / WW
Protection Grade : IP67
Package : 50 M / ROLL
Beam Angle : 120°
Life Span : 20,000h




AC 110V-220V Super Brightness Flexible LED Strip



FA-2835-60-HV



LED Qty : 60 pcs/m
Power : 6W/m
Input Voltage : AC110V / 220V
LED Color : W / WW
Protection Grade : IP67
Package : 100 M / ROLL
Beam Angle : 120°
Life Span : 20,000h




1. 100 meters or 50 meters per roll. Easy connection with a power cord, no need power supply any more! The plug of the power cord can be EU plug, UK plug, Au plug etc.
2. Different colors for your choice, white, warm white, blue, green, red, yellow, rgb, cool blue, pink.
3. IP67, PVC tube waterproof, safe. Very suitable for outdoor or indoor decoration, large projects.
4. Design in parallel, once one led dead, not affect others.
5. Wide Voltage range, AC220-AC240 or AC110-AC130.



FA-2835-120-HV



LED Qty : 120 pcs/m
Power : 9.6 W/m
Input Voltage : AC110V / 220V
LED Color : R / G / B / Y / W / WW
Protection Grade : IP67
Package : 100 M / ROLL
Beam Angle : 120°
Life Span : 20,000h




1. 100 meters or 50 meters per roll. Easy connection with a power cord, no need power supply any more! The plug of the power cord can be EU plug, UK plug, Au plug etc.
2. Different colors for your choice, white, warm white, blue, green, red, yellow, rgb, cool blue, pink.
3. IP67, PVC tube waterproof, safe. Very suitable for outdoor or indoor decoration, large projects.
4. Design in parallel, once one led dead, not affect others.
5. Wide Voltage range, AC220-AC240 or AC110-AC130.



FA-2835-180-HV



LED Qty : 180 pcs/m
Power : 18 W/m
Input Voltage : AC110V / 220V
LED Color : W / WW
Protection Grade : IP67
Package : 50 M / ROLL
Beam Angle : 120°
Life Span : 20,000h



LED Digital Bed-lighting Sensor Strip





TUV Report No.:50047313001

Model:	FA-CDA-1	FA-CDA-2
Color :	2700K,4000K,6000K	
Wattage:	3W	6W
Voltage:	DC12V	
LED/M:	30LEDS/M	
Strips length:	1.2M*1	1.2M*2
Sensor distance:	2-5M	



LED Digital Bed-lighting Sensor Strips

Human motion capture and artificial intelligent control, will not work during the day, night lights up, back to bed lamp off



Responds to your needs

Getting up at night becomes effortless with light designed to turn on and off when you need it.



Esay setup No tools required

Installed in few minutes with easily steps.
Ready to attach with 3M adhesive tape.



Feeling safe at night

As your foot touches the floor, the room is softly illuminated to guide you gently and safely through the room.



Thoughtful lighting

A warm soft glow of light, where you need it, when you need it, No disturbing glare to wake others and no fumbling to find the light switch in dark.

LED Motion Sensor Strip(Lithium battery)



Model:	FA-CDB-1
Color :	2700K,4000K,6000K
Wattage:	2.4W
Voltage:	DC3.7V
LED/M:	30LEDS/M
Strips length:	1M
Sensor distance:	2-5M



15SEC-6MIN: Sensor accommodation time:15sec-6min

human body motion sensor
Sensor Distance:2-4.5M

Switch(MANUAL/OFF/AUTO)

USB for Android

output interface for DC3.5


USB for Apple

Feature



- Human body and light sensor switch
- Lithium battery for powersupply
- Simple and easy to install
- Sensor is fixed by using magnet, easy to use
- Apply use apple and android phone charger

The switch built-in human body passive infrared (PIR) motion sensor and lithium battery is a multifunctional product. The sensor accommodation time:15sec-6min

LED Touch Sensor Cabinet Light

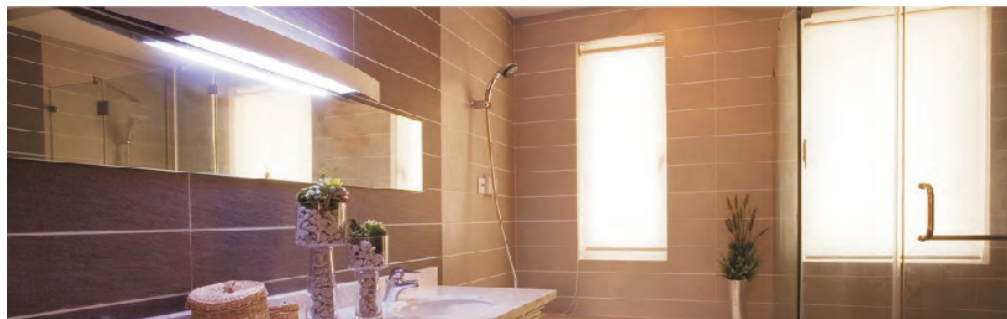


Model	FA-CGA-3W-300	FA-CGA-5W-500	FA-CGA-3W-300N	FA-CGA-5W-500N
Power	3W	5W	3W	5W
Body Material	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC
LED Type	SMD 2835	SMD 2835	SMD 2835	SMD 2835
LED Qty	30	57	33	60
CCT (K)	2700-6500	2700-6500	2700-6500	2700-6500
Lumens	220±10%	380±10%	220±10%	380±10%
CRI	80	80	80	80
Product Size	300*25*9mm	500*25*9mm	300*25*9mm	500*25*9mm
With Switch	YES	YES	NO	NO
Optional Switch	/	/	Touch Sensor Switch or Hand Wave Switch	Touch Sensor Switch or Hand Wave Switch

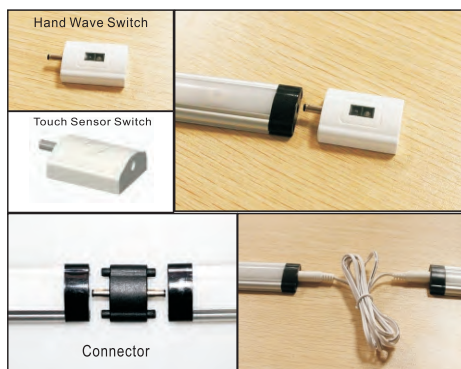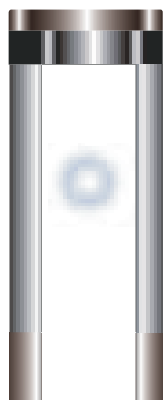

LED Motion Sensor Cabinet light (IR)



Model	FA-CGC-9W-600	FA-CGC-5W-300
Power	9W	5W
Body Material	Aluminum+PC	Aluminum+PC
LED Type	SMD 2835	SMD 2835
LED Qty	66	30
CCT (K)	2700-6500	2700-6500
Lumens	680±10%	380±10%
CRI	80	80
Product Size	600*40*10.5 mm	300*40*10.5 mm
Sensor distance	2-5M	2-5M

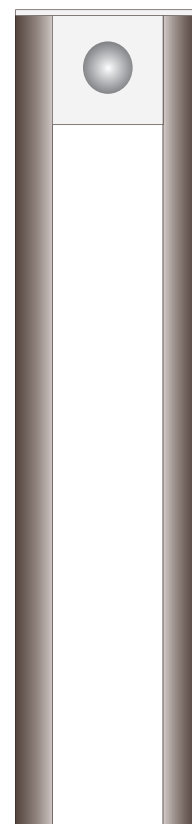


Feature

- Human body and light sensor switch
 - Simple and easy to install
- Adopt imported photoelectric induction switch.
Sensing distance: 6-10cm.
Hand scan, the lamp turn on.
once again, the lamp turn off.



LED Rail Line Lamp (Magnetic type)

Model:	FA-DGA-2W-100	FA-DGA-3W-200	FA-DGA-5W-300	FA-DGA-9W-600
Voltage	DC24V			
Power	2W	3W	5W	9W
Body Material	Aluminum+PC			
LED Type	SMD 2835			
LED Qty	14	28	35	77
CCT (K)	3000K 4000K 6000K			
Lumens	160	240	400	720
CRI	80			
Product Size	100*20*19mm	200*20*19mm	300*20*19mm	600*20*19mm




LED Rail Line Lamp (clip-on type)

Model:	FA-DGB-2W-100	FA-DGB-3W-200	FA-DGB-5W-300	FA-DGB-9W-600	FA-DGB-15W-1000	FA-DGB-18W-1200
Voltage	DC24V					
Power	2W	3W	5W	9W	15W	18W
Body Material	Aluminum+PC					
LED Type	SMD 2835					
LED Qty	14	28	35	77	126	154
CCT (K)	3000K 4000K 6000K					
Lumens	160	240	400	720	1200	1440
CRI	80					
Product Size	100*20*19mm	200*20*19mm	300*20*19mm	600*20*19mm	1000*20*19mm	1200*20*19mm


Feature

1. Easy installation, can be placed on the track and can slide freely at any position.
2. The lamp body with high performance magnets, the product through the magnet is fixed on the track, convenient installation.
3. The lamp can be seamless, according to the demand of rail and light length can be any longer.
4. With a variety of connectors, according to the needs of casual stitching.
5. The LED light source with high luminous efficiency, high performance and high heat dissipation aluminum shell, high expansion of light makes PC cover longer life, light more evenly, soft.

Accessories

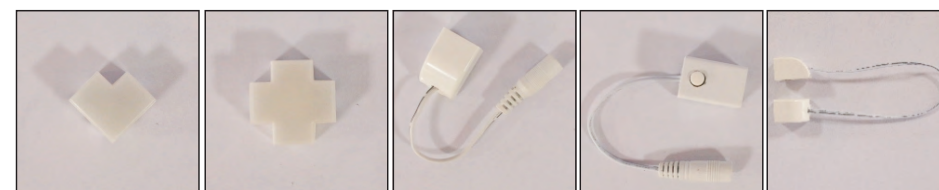

right-angle connector cross joint power cable power cable (With the switch) connecting cables

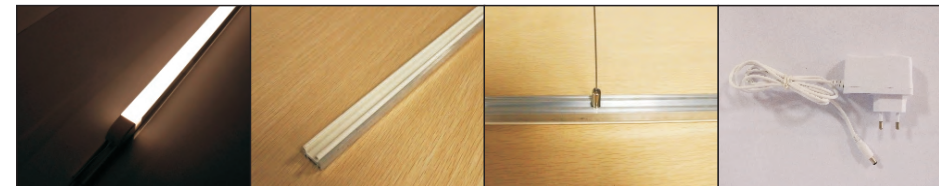

Rail 1 Hoisting Rail Hoisting rope Power supply

Effect picture




产品描述/Description

型号/Code: LT2325
 材质/Material: 6063铝合金 / AL 6063-T5
 表面/Surface: 阳极氧化银色 / Anodized Aluminum
 PC罩/PC Cover: 透明/扩散可选 / transparent, diffuser
 灯条宽度/Range width: 19mm
 适用长度/Available lengths: 0.5m-3.0m

用途/Application

嵌入或外挂天花吊顶照明, 室内灯光, 办公照明, 走廊照明, 商场卖场, 商业照明等
 Embedded Ceiling LED lighting, Suspended Ceiling LED lighting, Indoor LED lighting, office LED lighting, Corridor LED lighting, Shopping mall and store shelf LED lighting, ect

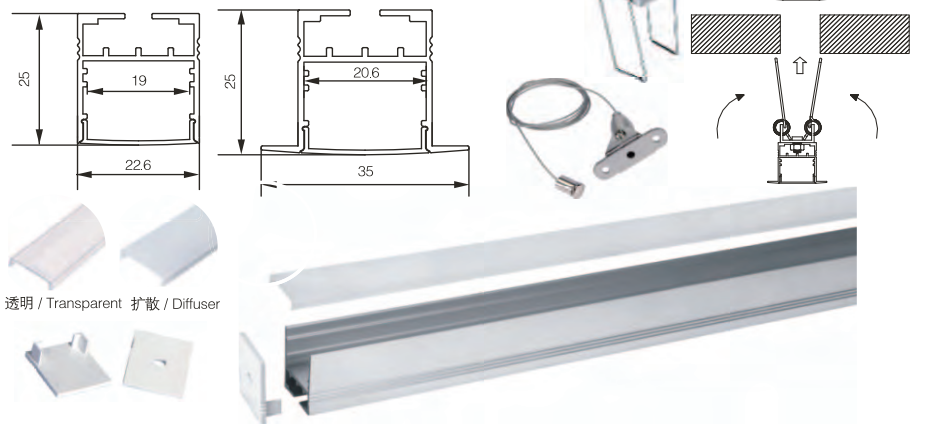


产品描述/Description

IP65

型号/Code: LW2508
 材质/Material: 6063铝合金 / AL 6063-T5
 表面/Surface: 阳极氧化银色 / Anodized Aluminum
 PC罩/PC Cover: 扩散 / Diffuser
 灯条宽度/Range width: 10-12mm
 适用长度/Available lengths: 0.5m-3.0m

用途/Application

防水照明, 卫浴照明, 室外照明, 地面照明等
 Outside lighting / Ground lighting / Waterproof lighting / Bathroom lighting

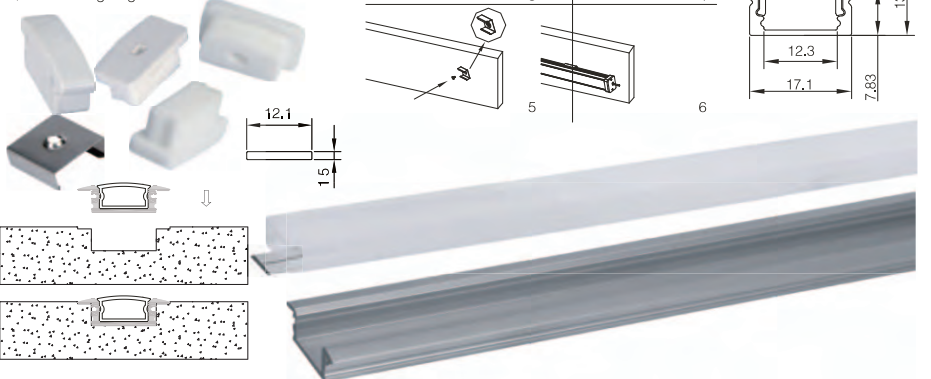


LP1612 产品描述/Description

型号/Code: LP1612
 材质/Material: 6063铝合金 / AL 6063-T5
 表面/Surface: 阳极氧化银色 / Anodized Aluminum
 PC罩/PC Cover: 透明/扩散/奶白可选 / transparent, diffuser, opal
 灯条宽度/Range width: 11mm
 适用长度/Available lengths: 0.5m-3.0m

用途/Application

地板嵌入照明, 天花嵌入照明
 Indoor LED lighting, Floor recessed LED lighting, Ceiling recessed LED lighting

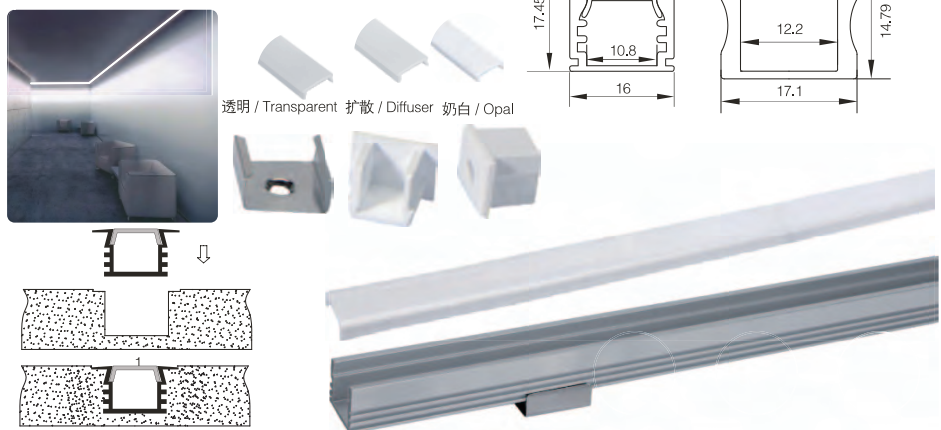


LP1616 产品描述/Description

型号/Code: LP1616
 材质/Material: 6063铝合金 / AL 6063-T5
 表面/Surface: 阳极氧化银色 / Anodized Aluminum
 PC罩/PC Cover: 透明/扩散/奶白可选 / transparent, diffuser, opal
 灯条宽度/Range width: 10mm
 适用长度/Available lengths: 0.5m-3.0m

用途/Application

墙角照明, 90度直角照明, 珠宝柜台, 商业柜台, 家具家居照明
 Corner LED lighting, 90 degree LED lighting, jewelry counter LED lighting, Store shelf LED lighting

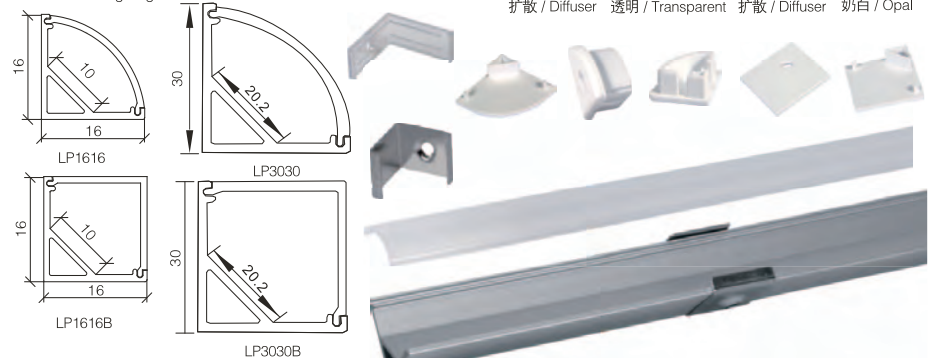


Choose The Right Profile & Strip


PCB类型	型号	尺寸图		
	05	FA-RS-A001		
	06	FA-RS-A002		
	07	FA-RS-A003		
10mm PCB	08	FA-RS-A004		
	09	FA-RS-A005		
	10	FA-RS-A017		
	11	FA-RS-A018		
	12	FA-RS-A006		
	13	FA-RS-A007		
	14	FA-RS-A008		
	15	FA-RS-A009		
10/12mm PCB	16	FA-RS-A010		
	17	FA-RS-A011		
	18	FA-RS-A012		
	19	FA-RS-A013		

24V 12W 60LED/M 10mmPCB 	24V 15W 84LED/M 10/12mmPCB 	24V 24W 120LED/M 10/12mmPCB
850Lm	1000Lm	1650Lm
1050Lm	1260Lm	2100Lm
850Lm	1000Lm	1650Lm
1050Lm	1260Lm	2100Lm
850Lm	1000Lm	1650Lm
1100Lm	1320Lm	2200Lm
1100Lm	1320Lm	2200Lm
870Lm	1020Lm	1700Lm
870Lm	1020Lm	1700Lm
870Lm	1020Lm	1700Lm
950Lm	1150Lm	1880Lm
1065Lm	1300Lm	2130Lm
1065Lm	1300Lm	2130Lm
1050Lm	1260Lm	2100Lm
850Lm	1000Lm	1650Lm

LED PROFILE SECTION DIAGRAM

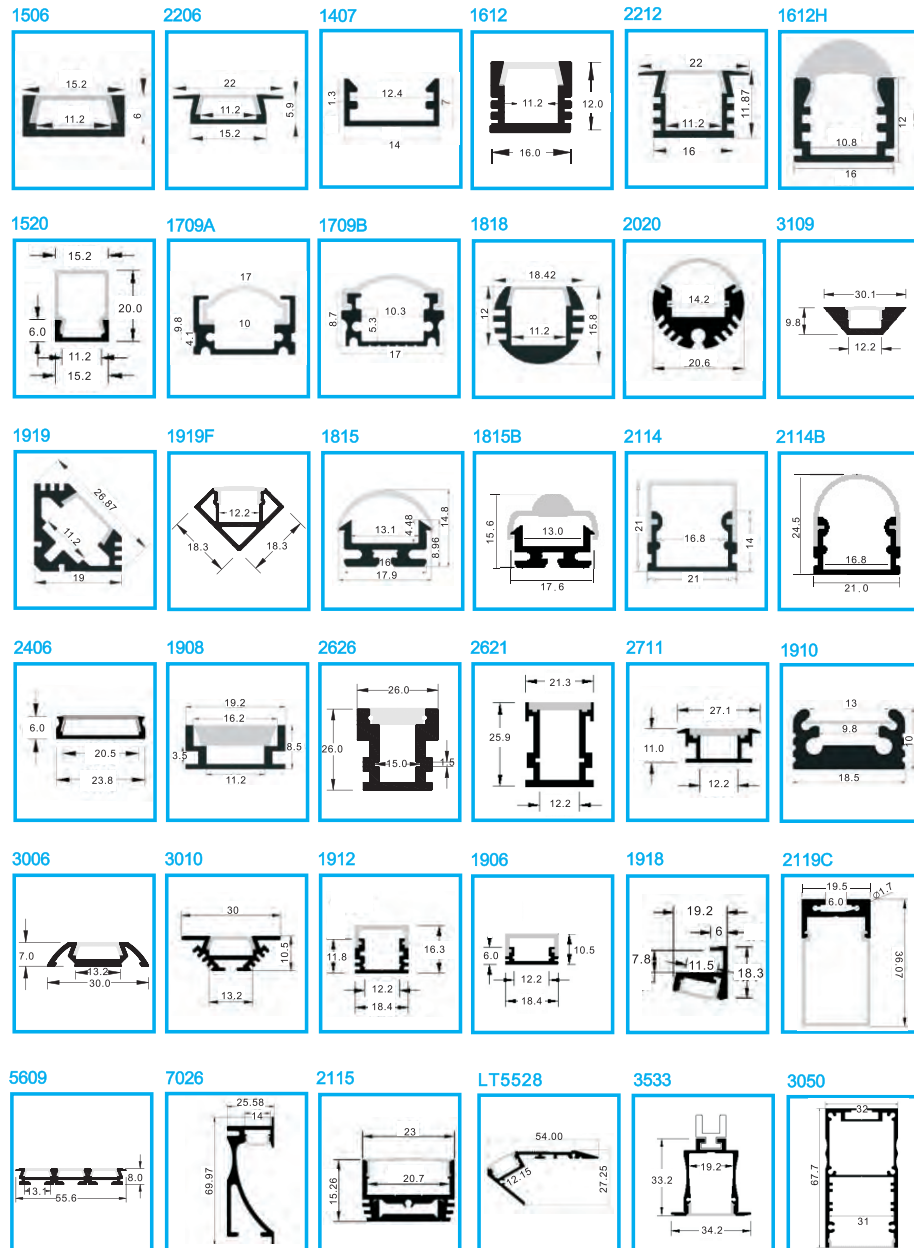


LED PROFILE SECTION DIAGRAM

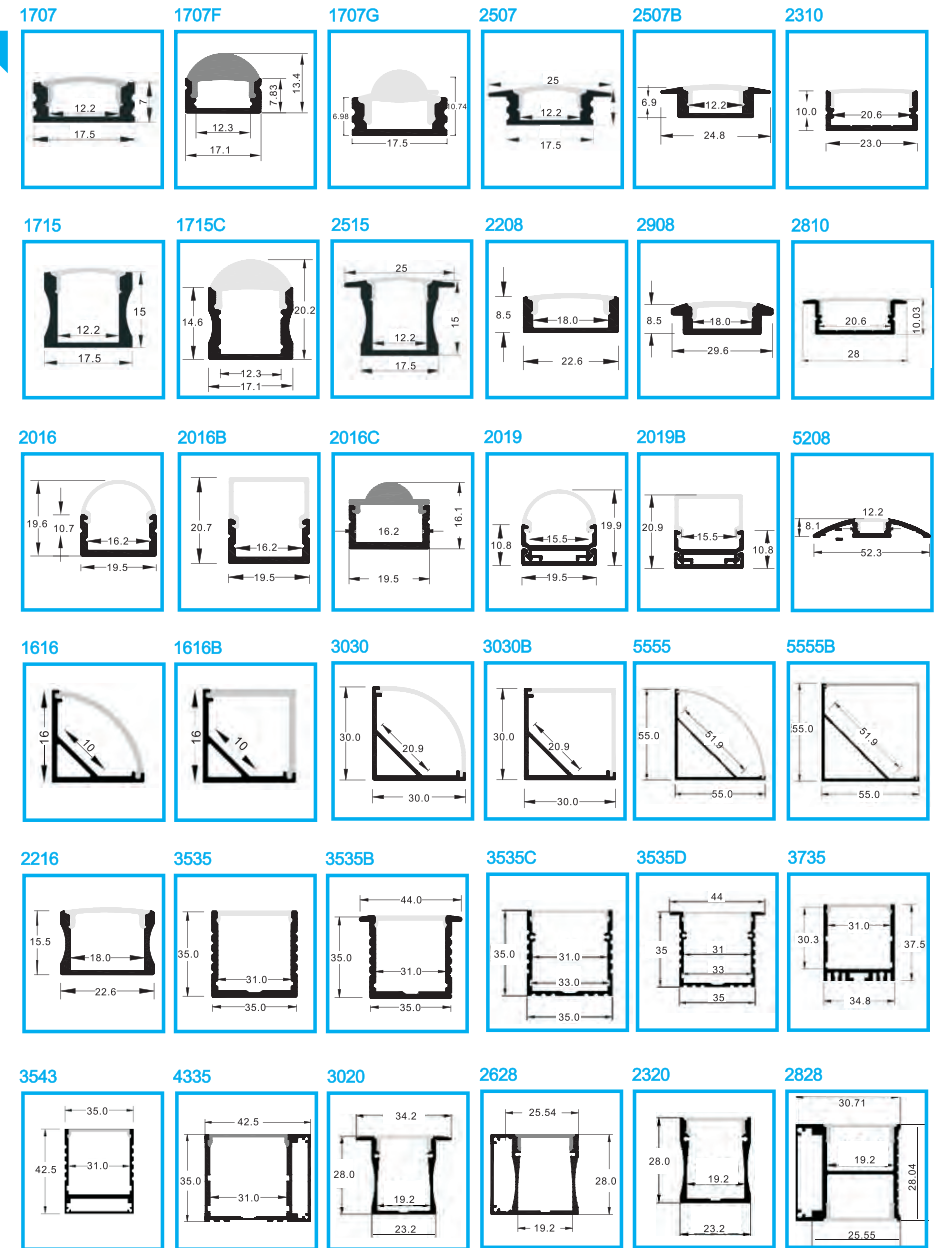


How do I Specify my Project


- 1 Select your mounting e.g. Surface Mounted/ Reassessed/ Pedant/ Adjustable Hose.**

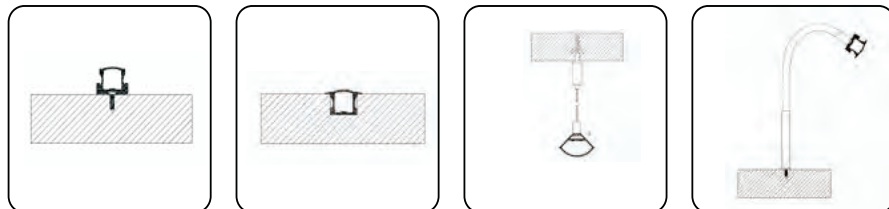


- 2 Select your profile model.**

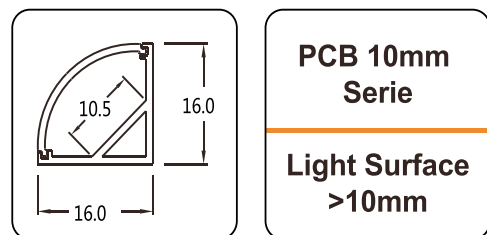

- 3 Select your Light Diffuser model based on light effect and beam angle. (*Reminder: Consider Diffuser Transparency)**

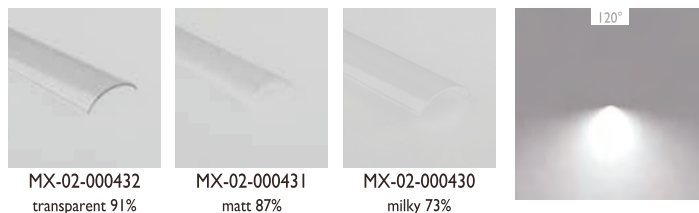

- 4 Select your Color Temperature and CRI**

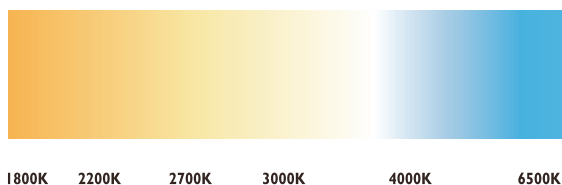


- 5 Select your Light Intensity and use the right strip:**

24V 24W 120LED/M 10/12mmPCB




2200Lm/m



- 6 Select your required Length and considering the strip cuttable length.**



- 7 Select your Power Supply System considering Dimming, Input Voltage and Output Power.**

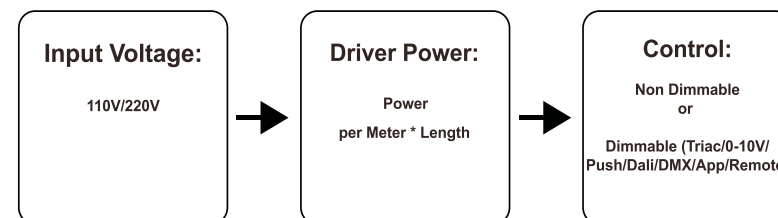

- 8 Example:**

Profile:Surface Mounted FA-RS-A017

+

Diffuser: FA-02-000432

+

LED Strip:24V24W120LED/M10mmPCB 4000K CRI80 2Meter

+

Driver:FA-03-180254 60 Triac Dimmable Driver